

VA-DIRECT

The design is ideal in open structure ceiling configurations since the speaker, terminal and switch will be hidden when the speaker is hung from the deck.

The VoiceArrest™ VA-DIRECT is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 13cm (5 in.) driver installed in a sealed enclosure.


It is typically installed by VoiceArrest™ as a direct-field speaker. In the case of an open ceiling, it can be attached to the structure. The VA-DIRECT loudspeaker can be oriented in any direction. Four different power taps (½, 1, 2 and 4W) controlled with a rotary switch allow quick adjustments to the output level. A RoHS compliant version is also available.

Specifications:

| | |
|---------------------|-----------------------------|
| Power: | 10 watts |
| Line Voltage: | 25 V |
| Sensitivity: | 91 dB |
| Material: | ABS fire proof |
| Frequency Response: | 100-10000 Hz |
| Connectors: | 4mm (5/32") Screw terminals |
| Driver: | 13cm (5 in.) fullrange |
| Color: | Black or White |
| Weight: | 1.6 kg (3.5 lbs) |
| Shipping Weight: | 1.8 kg (4 lbs) |



Frequency Response:

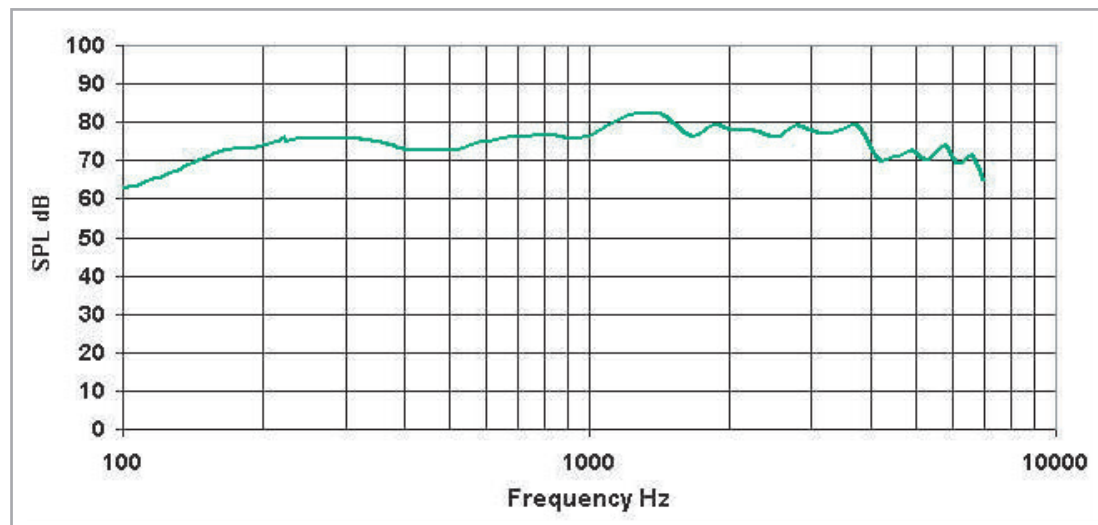

Specifications are subject to change without notice

*Tap speaker to 2W@25V